


extrex[®] RV / RB

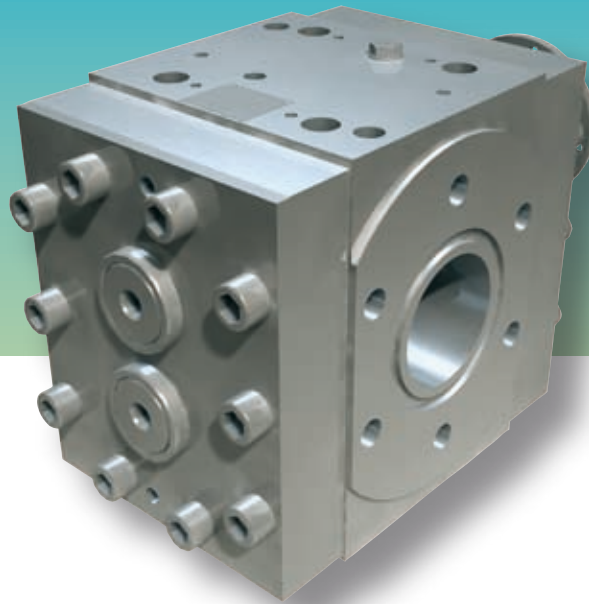

A range of typical pumping media:

- Butadiene rubber
- Chloroprene rubber
- Ethylene-propylene-terpolymer rubber
- Nitril-butadiene rubber
- Styrene-butadiene rubber
- Natural rubber
- Others upon request

Gear pumps for elastomers

When it comes to manufacturing profiles and dealing with Strainers, high requirements are placed on pumping consistency and extrusion lines. The new gear pump series extrex[®] RB/RV from Maag Pump Systems raises the performance of gear pumps for elastomer extrusion to new levels in terms of both economy and processing technology. Product quality is guaranteed by a stable discharge, the lowest tolerance deviations and achieving process stability in quick time.

The recently developed series is characterised by the optimised conveying characteristics for gear pumps. This series expands the processing scope for temperature, degree of plasticising and pressure build-up when working the compounds. It simplifies the operating mode of the extrusion line and dramatically improves the quality of the end product. extrex[®] gear pumps have optimised flow channel geometry and a temperature-controlled pump housing.

There are two types to choose from:

- **extrex[®] RV** for a broad application range
- **extrex[®] RB** for applications with high discharge pressure

Your benefits:

- Optimised flow channels
- Highly efficient self-cleaning properties
- Low pulsation pumping even at high differential pressures
- Compact design

	extrex® RV	extrex® RB
Discharge pressure in bar	to 350	to 450
Differential pressure in bar	to max. 250	to max. 350
Pump sizes	36 to 110	56 to 110
Specific volume in cm ³ /rev	25.6 to 718	59 to 457
Throughput range in kg/h	15 to 1,500	50 to 1,000

design values, application range may differ depending on product



Application limits:

Mooney ML 1+4 (100):	to 100
Viscosity:	to 30,000 Pas
Temperature:	to 130 °C
Inlet pressure	to 120 bar

Technical specifications:

Housing & cover:	alloy steel
Gear shafts:	nitrided tool steel, prepared for shaft cooling
Bearing:	tool steel
Shaft seals:	alloy steel
Pump heating:	liquid temperature controlled

Theoretical conveying capacities:

Rubber applications		Butadiene/ nitril-butadiene		Ethylene-propylene- terpolymer		Chloroprene/ styrene-butadiene/ natural rubber	
Density [g/cm ³]		1.10		1.20		1.35	
Viscosity [Pa s]		5,000 to 15,000		5,000 to 12,000		7,000 to 12,000	
extrex® RV							
Pump size	Specific volume [cm ³ /rev]	[rev/min]	[kg/h]	[rev/min]	[kg/h]	[rev/min]	[kg/h]
36	25.6	60	90	70	105	70	130
45	46.3	50	140	55	150	55	190
56	92.6	40	230	45	270	45	300
70	176.0	35	380	40	460	40	510
90	371.0	30	690	35	840	35	950
110	718.0	25	1,120	25	1,160	25	1,300
extrex® RB							
56	56.0	45	160	50	180	50	210
70	108.0	40	270	45	320	45	360
90	219.0	35	480	40	570	40	640
110	433.0	30	810	35	980	35	950

Accessories:

- Base and base frame
- Adapter flange
- Sensors
- Controllers, expac® complete solutions
- Drives

Options:

- Various tolerance classes
- Choice of materials for every application
- Shaft cooling with contact protection
- Bearing lubrication with internal recirculation

Switzerland

Maag Pump Systems AG
Aspstrasse 12
8154 Oberglatt
Schweiz
Phone +41 44 278 82 00
Fax +41 44 278 82 01
welcome@maag.com
www.maag.com

Singapore

Maag Pump Systems Pte Ltd.
25 International Business Park
04-73 German Center
Singapore 609916
Phone +65 6562 8720
Fax +65 6562 8729
MaagSingapore@maag.com
www.maag.com

USA

Maag Pump Systems Inc.
1500 Continental Boulevard
Charlotte, NC 28273
USA
Phone +1 704 716 9000
Fax +1 704 716 9001
MaagAmericas@maag.com
www.maag.com

France

Maag Pump Systems SAS
111, Rue du 1er Mars 1943
69100 Villeurbanne
France
Phone +33 4 72 68 67 30
Fax +33 4 72 68 67 31
MaagFrance@maag.com
www.maag.com

Germany

Maag Pump Systems GmbH
August-Kümpers-Strasse 9
48493 Wettringen
Deutschland
Phone +49 2557 92 80 0
Fax +49 2557 92 80 20
MaagGermany@maag.com
www.maag.com

China

Maag Pump Systems Shanghai
Room 1204A, Silver Tower
218 South Xi Zang Road
200021 Shanghai, China
Phone +86 21 6334 3666
Fax +86 21 6334 3336
MaagChina@maag.com
www.maag.com

Italy

Maag Pump Systems S.r.l.
Viale Romagna 7
20089 Rozzano (MI)
Italia
Phone +39 02 575 932 1
Fax +39 02 575 932 32
MaagItaly@maag.com
www.maag.com

www.maag.com